



SCP SERIES PUMPS

Features:


- * This pump is designed for jetted bath tubs, spa pools, swimming pools, massage stations, cleaning system.
- * High performance and super pressure.
- * 2" inlet and outlet for highing performance and lowering noise.
- * Capacitor running type for energy-saving, the best choice for low noise.
- * Thermal overload protector inside ensure the motor safety and prolongs the motor service life.

Motor:

- * 2 - pole induction motor
- * Single-phase: 220-240V/50Hz/60Hz
- * Single-phase with thermal protector from T.I
- * Capacitor inset
- * Insulation class F
- * Protection IPX5, aircool motor aremoisture
- * Proof and low temperature
- * Continuous duty


Operation Conditions:

- * Liquid temperature from +5°C~+60°C
- * Ambient temperature up to 50°C
- * Max. Working pressure: 2.5 bar

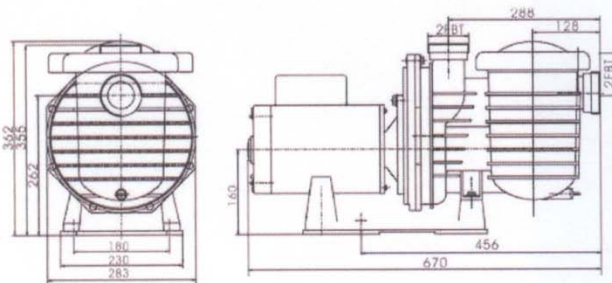

Model	Horsepower (HP)	Voltage (V)	Inlet Port Dia. (inch)	Outlet Port Dia. (inch)	A Length (mm)	B Width (mm)	C Height (mm)
WL-SCP100E	1.0	220	2	2	635	283	362
WL-SCP150E	1.5	220	2	2	635	283	362
WL-SCP200E	2.0	220	2	2	635	283	362
WL-SCP300E	2.5	220	2	2	635	283	362
WL-SCP400E	3.0	220	2	2	635	283	362

QH. Curve of The Pump

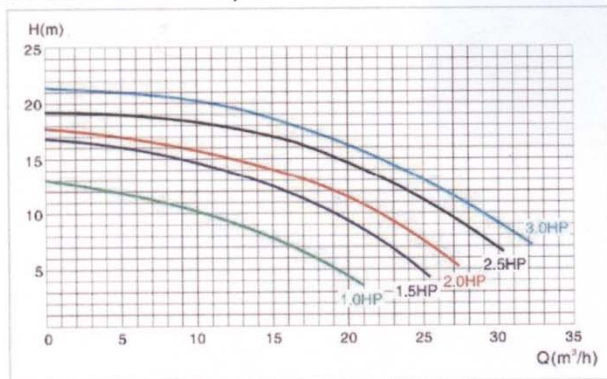

Importado y Distribuido por:

EQUIPISCINAS C.A

Dirección: Las Mercedes, Av. Orinoco, Edif. Andrade Pools II, Caracas. Telef: (0212) 9931611/1006/6322/3133. Fax: (0212) 9933361. E-mail:

info@piscinaslatinoamericanas.net / pislata1@cantv.net Web: www.piscinaslatinoamericanas.net